

**\*\*\*READ & SAVE THESE INSTRUCTIONS \*\*\***  
**ACCESS LIGHTING**  
**MODEL 23901, 23902, 23903, 23904**  
**INSTALLATION & OPERATION INSTRUCTIONS**

**(1) TOOLS AND MATERIALS REQUIRED**

- ❖ BLADE SCREW DRIVER
- ❖ WIRE CUTTERS
- ❖ WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE
- ❖ 1, 2, 3, 4 x 60W/E26/ A-19 Lamp (medium Base) (model dependant)

***Attention:***

*Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.*

**(2) GENERAL**

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 1/4" deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before commencing with the installation, **disconnect the power by turning off the circuit breaker** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

***NOTE:***

*The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.*

**(3) UNPACKING THE FIXTURE**

On checking the contents of the box you will find;

- ❖ Crossbar
- ❖ Mounting Hardware
- ❖ Fixture Back Plate
- ❖ Glass Diffuser

**Do not install this fixture assembly closer than 6 inches from any curtain or similar combustible material.**

**(4) PREPARE THE FIXTURE**

***Refer to attached illustration of fixture parts and assembly.***


1. If you are replacing an existing fixture disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Secure the **Crossbar** to the junction box with the supplied **Mounting Screws (1)**. Make sure that the supplied **nipple** is already inserted into the **Crossbar**, faces outwards and is screwed in +/- three quarters of the way.
3. Connect the **BLACK** supply wire to the **Black** wire of the fixture with supplied **Wire Nuts (2)** ensuring a secure connection.
4. Connect the **WHITE** supply wire to the **White** wire from the fixture a secure with supplied **Wire Nuts (2)**.
5. Attach the **ground (GREEN)** wire from the fixture to the **outlet box ground terminal** (or to the box ground wire).
6. Secure all wire nuts connections with UL listed electrical tape. Tuck wires carefully into Junction box.
7. Fit the **Fixture Back Plate** over the **Crossbar**, such that the nipple fits through the designated hole in the **Fixture Back Plate**. Secure the **Fixture Back Plate** with the supplied **Thumb Nut** by screwing it onto the end of the nipple. The Thumb Nut should sit flush to the **Fixture Back Plate** (so you may need to adjust the nipple length).
8. Insert a 60W/E26/A-19 Lamp (4). **DO NOT EXCEED WATTAGE SPECIFIED ON WARNING LABEL**
9. Fit the **Glass Diffuser** over the **Socket** and secure with the **Glass Retaining Ring**.
10. Restore electricity and check the operation of your new lighting fixture.

***CAUTION:***


- **Ensure that the Fitting is Cool and Switched off, Before Changing the Bulb.**
- **Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.**
- **Do Not handle bulbs with bare hands; use supplied soft cloth.**
- **Warning-Risk of fire and electric shock. Important safety instructions. Do not install this fixture in hazardous locations.**

a c c e s s




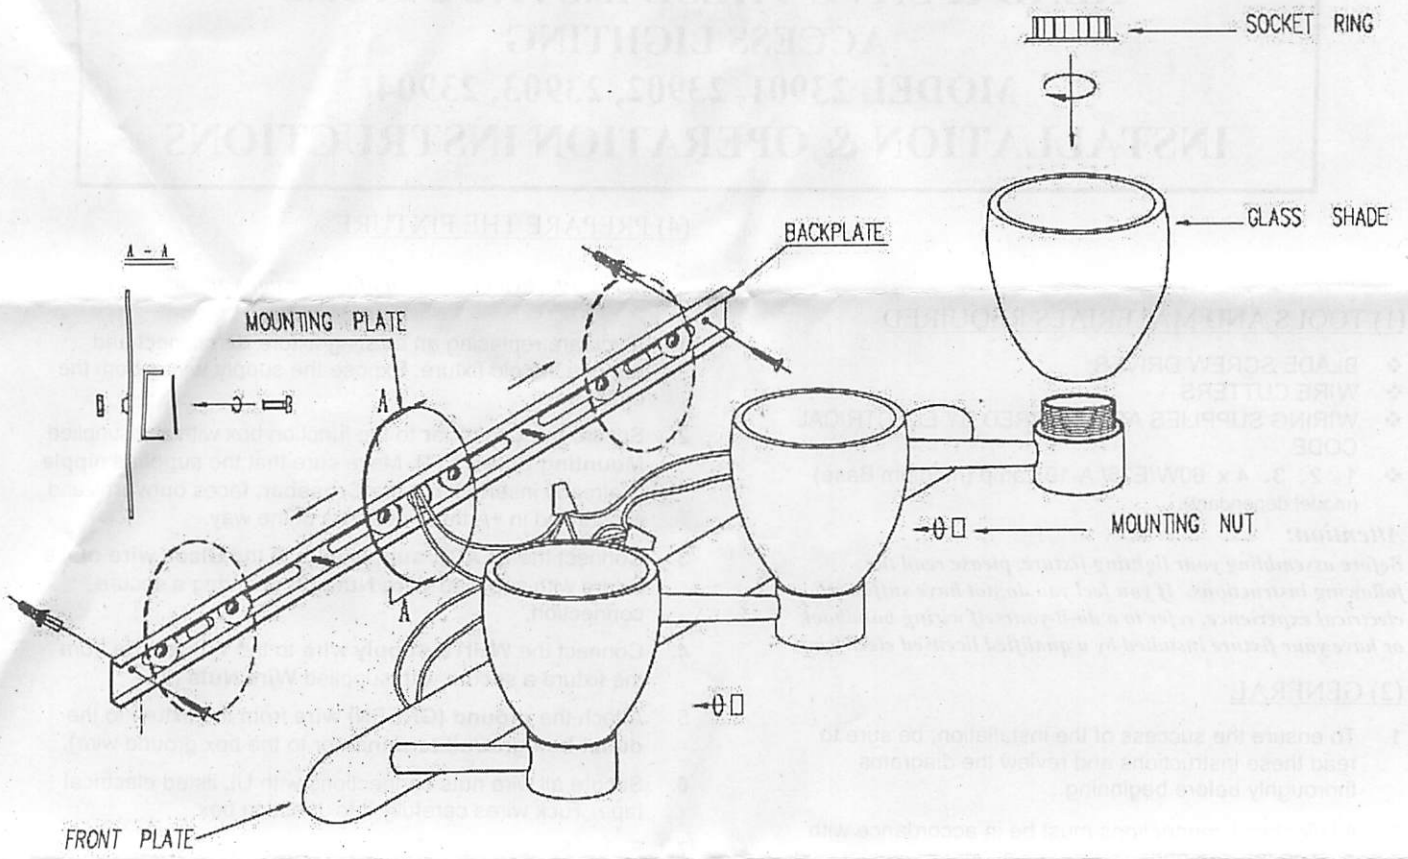


23903



23901

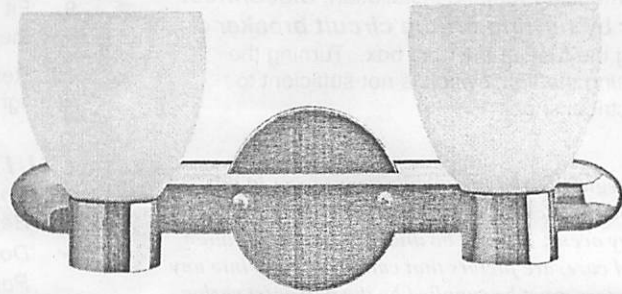

23902

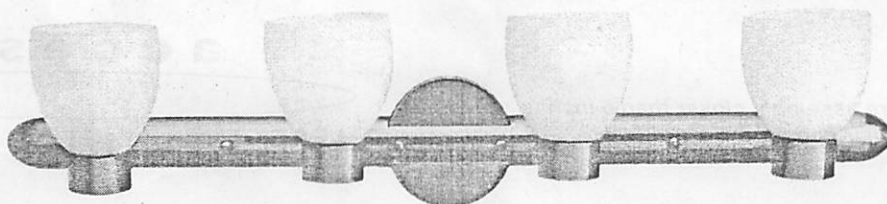

23904